





mm	d _o	h _{ef}	Ø d _b	T _{inst} , max	1 x	RSB		
						RSB	Art. No.	
RG M	M8	Ø 10 mm	80 mm	11	10	1 x	RSB 8	518807
		M10	Ø 12 mm	75 mm	14	20	1 x	RSB 10 mini
	90 mm		14	20	1 x	RSB 10	518821	
	150 mm		14	20	2 x	RSB 10 mini	518820	
	M12	Ø 14 mm	75 mm	16	40	1 x	RSB 12 mini	518822
			110 mm	16	40	1 x	RSB 12	518823
		150 mm	16	40	2 x	RSB 12 mini	518822	
	M16	Ø 18 mm	95 mm	20	60	1 x	RSB 16 mini	518824
			125 mm	20	60	1 x	RSB 16	518825
		190 mm	20	60	2 x	RSB 16 mini	518824	
	M20	Ø 25 mm	170 mm	27	120	1 x	RSB 20	518827
			210 mm	27	120	1 x	RSB 20 E / 24	518828
M24	Ø 28 mm	210 mm	30	150	1 x	RSB 20 E / 24	518828	
M30	Ø 35 mm	280 mm	40	300	1 x	RSB 30	518829	


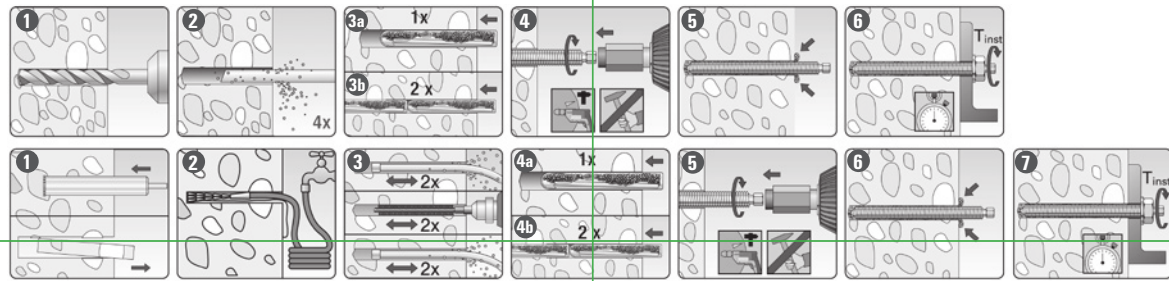


°C	-30 - -20	-19 - -15	-14 - -10	-9 - -5	-4 - ±0	+1 - +5	+6 - +10	+11 - +20	+21 - +30	+31 - +40
120 h	48 h	30 h	16 h	10 h	45 min	30 min	20 min	5 min	3 min	


mm	d _o	h _{ef}	Ø d _b	T _{inst} , max	1 x	RSB		
						RSB	Art. No.	
RG MI	M8	Ø 14 mm	90 mm	16	10	1 x	RSB 10	518821
	M10	Ø 18 mm	90 mm	20	20	1 x	RSB 12	518823
	M12	Ø 20 mm	125 mm	25	40	1 x	RSB 16	518825
	M16	Ø 24 mm	160 mm	26	80	1 x	RSB 16 E	518826
	M20	Ø 32 mm	200 mm	40	120	1 x	RSB 20 E / 24	518828

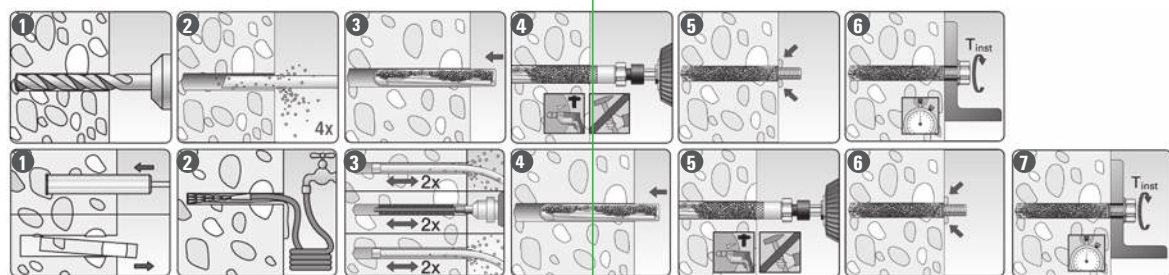

RSB Superbond System



* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présent un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).



fischer
innovative solutions

fischerwerke GmbH & Co. KG
Weinhalde 14-18
72178 Waldachtal, Germany
Tel. +49 7443 12-0
Fax +49 7443 12-4222
www.fischer.de

123919 - 47/2012 - ZE

fischer
innovative solutions



RA-SDS
Art. No. 062420



SDS max 1/2" VK (M16 - M20)
Art. No. 001538



SDS max 3/4" VK (M20 - M30)
Art. No. 001539



SDS plus 1/2" VK (M8 - M16)
Art. No. 001537



SK SW 8 1/2" VK (M8 - M22)
Art. No. 001536

Hand pump
Art. No. 089300



Compressed air pistol
Art. No. 09286



Installation instruction



see ICC-ES Evaluation Report
No. 3572 at www.icc-es.org
Quality Contr of Agency IEA (AA -707)

fischer adhesive anchoring system RSB

fischer RSB is an adhesive anchoring system for fastenings in normal weight concrete.

Important:

Before use, read and review the installation instructions and the SDS (safety data sheet). Do not use expired adhesive.

A Installation in hammer-drilled hole

1. Drill the hole. Drill hole diameter d_o and drill hole depth h_o , see **Table 2** or **3**.
2. Drill hole cleaning: Blow out the drill hole four times with oil-free compressed air ($p \geq 6$ bar). The use of a manual blow-out pump is possible, if at the same time the drill hole diameter is less than 18 mm and the embedment depth h_{ef} is less than $10d$.
3. Resin capsule RSB or two RSB mini, must be pushed into the drill hole by hand. Depending on the anchor being installed, a suitable setting tool should be used.
4. Only use clean and grease-free anchors. Using a suitable adapter, drive the RG M into the capsule using a hammer drill set on rotary hammer action. Stop when the anchor reaches the bottom of the hole and is set to the correct embedment depth.
5. When fully embedded, excess mortar must emerge from the mouth of the drill hole. If not, the anchor must be pulled out directly and a second resin capsule must be pushed into the drill hole. Setting process must be repeated, step (4).
6. Wait for the specified curing time. t_{cure} see **Table 1**.
Mounting the fixture $T_{inst,max}$ see **Table 3**.



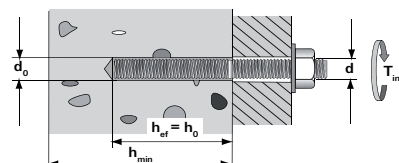


Table 2

Rods	Ø	Drill bit	Anchoring depth	Brush	Capsule		RSB	
					1 x	2 x	RSB	Item No.
mm	inch	d_o	h_{ef}	$\varnothing d_b$				
RG M	M8	3/8	Ø 10 mm	80 mm	11	1 x	RSB 8	518807
				75 mm	14	1 x	RSB 10 mini	518820
	M10	15/32	Ø 12 mm	90 mm	14	1 x	RSB 10	518821
				150 mm	14	2 x	RSB 10 mini	518820
				75 mm	16	1 x	RSB 12 mini	518822
	M12	9/16	Ø 14 mm	110 mm	16	1 x	RSB 12	518823
				150 mm	16	2 x	RSB 12 mini	518822
				95 mm	20	1 x	RSB 16 mini	518824
	M16	1 1/16	Ø 18 mm	125 mm	20	1 x	RSB 16	518825
				190 mm	20	2 x	RSB 16 mini	518824
	M20	1	Ø 25 mm	170 mm	27	1 x	RSB 20	518827
				210 mm	27	1 x	RSB 20 E / 24	518828
M24	1 1/8	Ø 28 mm	210 mm	30	1 x	RSB 20 E / 24	518828	
M30	1 3/8	Ø 35 mm	280 mm	40	1 x	RSB 30	518829	

Brush with extension



Hand pump



Compressed air pistol




B Installation in diamond-drilled hole

1. Drill the hole. Drill hole diameter d_o and drill hole depth h_o , see **Table 2** or **3**. Break the drill core and remove.
2. Flush the drill hole until the water becomes clear.
3. Blow out the drill hole two times, using oil-free compressed air ($p > 6$ bar).
Brush the drill hole two times using a power drill.
Blow out the drill hole two times, using oil-free compressed air ($p > 6$ bar).
4. Resin capsule RSB or two RSB mini, must be pushed into the drill hole by hand. Depending on the anchor being installed, use a suitable setting tool.
5. Only use clean and grease-free anchors. Using a suitable adapter, drive the RG M into the capsule using a hammer drill set on rotary hammer action. Stop when the anchor reaches the bottom of the hole and is set to the correct embedment depth.
6. When reaching the correct embedment, excess mortar must emerge from the mouth of the drill hole. If not, the anchor must be pulled out directly and a second resin capsule must be pushed into the drill hole. Setting process must be repeated (5).
6. Wait for the specified curing time. t_{cure} see **Table 1**.
Mounting the fixture $T_{inst,max}$ see **Table 3**.

Table III Threaded rod

d	Drill bit		Anchoring depth		Minimum member thickness		Minimum spacing, edge distance		Maximum torque	
	d_o		h_{ef}		h_{min}		$s_{min} = c_{min}$		$T_{inst, max}$	
mm	mm	inch	mm	inch	mm	inch	mm	inch	Nm	$f_t - l_b$
M8	10	3/8	80	3.15	h _{ef} + 30	h _{ef} + 1.25	40	1.57	10	7.35
M10	12	15/32	75	2.95			45	1.77	20	14.75
			90	3.54			45	1.77	20	14.75
			150	5.91			45	1.77	20	14.75
M12	14	9/16	75	2.95			55	2.17	40	29.50
			110	4.33			55	2.17	40	29.50
			150	5.91	55	2.17	40	29.50		
M16	18	1 1/16	95	3.74	65	2.56	60	44.25		
			125	4.92	65	2.56	60	44.25		
			190	7.48	65	2.56	60	44.25		
M20	25	1	170	6.69	h _{ef} + 2d _o	h _{ef} + 2d _o	85	3.35	120	88.50
			210	8.27			85	3.35	120	88.50
			M24	28			1 1/8	210	8.27	105
M30	35	1 3/8	280	11.02			140	5.51	300	221.25

A Installation in hammer-drilled hole

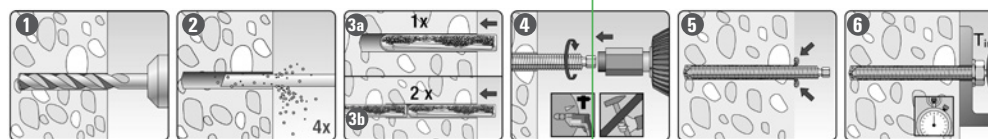

B Installation in diamond-drilled hole


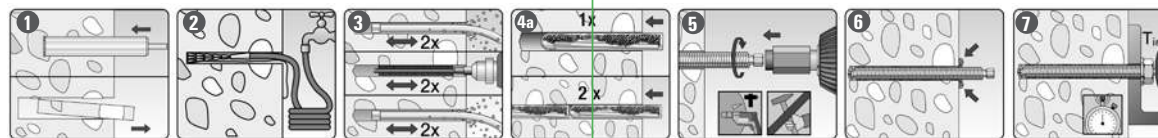



Table I Curing times

Temperature range		Curing time
°C	°F	
> -20 to -15	> -4 to +5	48 h
> -15 to -10	> +5 to +14	30 h
> -10 to -5	> +14 to +23	16 h
> -5 to ±0	> +23 to +32	10 h
> ±0 to +5	> +32 to +41	45 min
> +5 to +10	> +41 to +50	30 min
> +10 to +20	> +50 to +68	20 min
> +20 to +30	> +68 to +86	5 min
> +30 to +40	> +86 to +104	3 min



+41 - +77 °F
+5 - +25 °C

Store mortar
in a cool dry place.

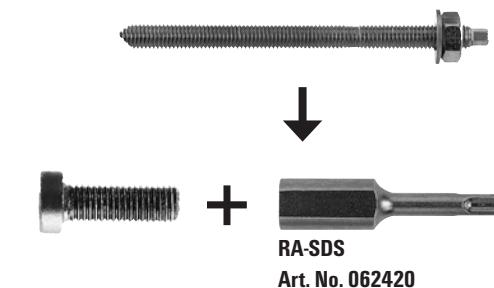

RA-SDS
Art. No. 062420



SDS max 1/2" VK (M16 - M20)
Art. No. 001538



SDS max 3/4" VK (M20 - M30)
Art. No. 001539



SDS plus 1/2" VK (M8 - M16)
Art. No. 001537



SK SW 8 1/2" VK (M8 - M22)
Art. No. 001536

fischer innovative solutions

fischerwerke GmbH & Co. KG
Weinhalde 14-18, 72178 Waldachtal, Germany
Tel. +49 7443 12-0, Fax +49 7443 12-4222
www.fischer.de